



## MEMBRANE ELEMENT

## PMES2-4040LF


Low Fouling Technology & Low Energy

### SPECIFICATIONS

Nominal Membrane Area:	85 sq.ft
Permeate Flow:	2,500 gpd
Stabilized Salt Rejection:	99.7 %
Membrane Polymer:	Polyamide Thin-Film Composite
Feed Spacer thickness:	34 mil (0.864mm)

The stated performance is based on the following conditions:

1500 ppm NaCl  
150 psi (1.05 MPa) Applied Pressure  
77 °F (25 °C) Operating Temperature  
15% Permeate Recovery  
pH 7.5

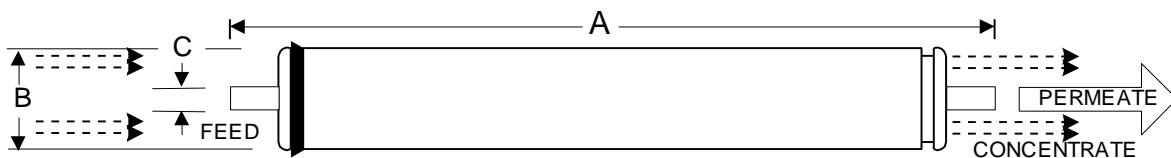

A, inches (mm)	B, inches (mm)	C, inches (mm)	Weight, lbs. (kg)
40.0 (1016)	3.9 (99)	0.75 (19)	8 (3.6)

### OPERATING DATA

Maximum Applied Pressure:	600 psig (4.16 MPa)
Free Chlorine Tolerance:	< 0.1 ppm
Maximum Operating Temperature:	113 °F (45 °C)
Continuous pH Range (Cleaning):	2.5 – 10.5 (2 - 12)
Maximum Feedwater Turbidity:	1.0 NTU
Maximum Feedwater SDI (15 mins):	5.0
Maximum Feed Flow:	16 gpm (3.6 m <sup>3</sup> /h)
Minimum Ratio of Concentrate to Permeate Flow for any Element:	5:1
Maximum Pressure Drop:	15 psi

#### NOTICE:

Permeate flow for individual element may vary + or - 15 percent. All membrane elements are supplied with a brine seal, interconnector and o-rings in a sealed polyethylene plastic bag. Use glycerin or silicon only, for lubrication of seals and o-rings. Static permeate back pressure must be always avoided. The information and data are offered in good faith, but without guarantee. Please refer to the application information literature entitled Operation Guidelines for more information before installing and operating the elements. Specifications can be modified without prior notice.